


AXIS D6210 Air Quality Sensor

Table of Contents

Solution overview3
.....3
Installation4
Configure your device.....5
 About the device.....5
 Set up rules for events.....5
 Record video when there is an alarm5
 Activate strobe siren over MQTT when there is an alarm5
 Flash status LED on air quality sensor when there is an alarm6
 Calibration for the first run of the device7
The web interface8
Specifications.....9
 Product overview9
 AXIS D62109
 LED indicators.....9
 Connectors.....9
 Network connector9
Troubleshooting.....10
 Technical issues, clues and solutions10
 Contact support.....10

Solution overview

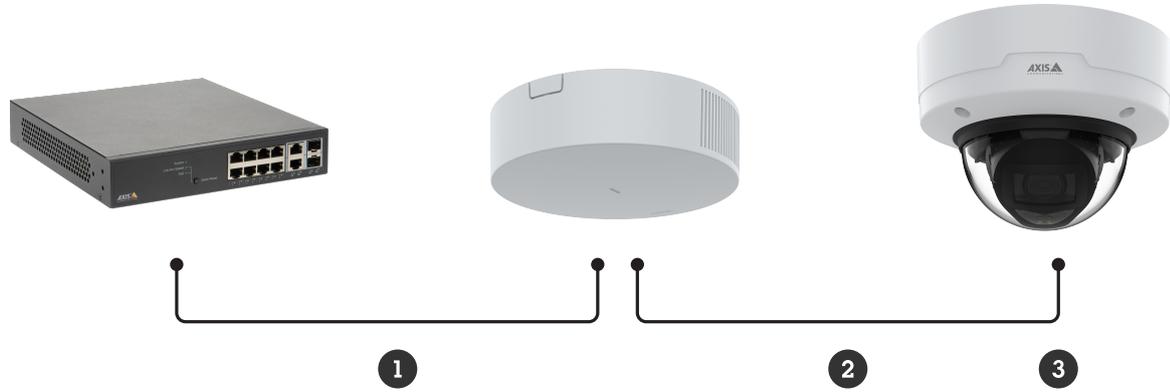

- 1 PoE in
- 2 PoE out
- 3 Host device

Installation

Important

- Keep at least 1.5 meters (4.9 feet) away from areas with significant vents, or pollution sources. This includes air vents, doors, windows, cooking areas etc.
- Install the device in a location that allows free air flow.
- For effective vaping or smoking detection, install the device on the ceiling at a height of 2.4–2.7 meters (7.9–8.9 feet) from the floor.
- For effective air quality and environmental monitoring, install the device at a height of 0.9–1.8 meters (3.0–5.9 feet) from the floor.

For detailed installation instructions, see the installation guide.

Configure your device

About the device

When you connect your device to a supported host device, settings for **Air quality monitor** tab will appear on the host device's webpage.

You can manage all the settings described in this manual through the host device's webpage.

Set up rules for events

To learn more, see *Get started with rules for events*.

Record video when there is an alarm

The following example explains how to set up a camera to record video to an SD card when the air quality sensor detects vaping.

1. In the camera's webpage, go to **Settings > System > Storage** to check that the SD card is mounted.
2. Go to **Settings > System > Events** and add a rule. Enter the following information:
 - **Name:** Type a name for the rule.
 - **Condition:** **Air quality monitor > Vaping or smoking detected**.
 - **Action :** **Recordings > Record video**.
 - **Storage:** **SD card** . Make sure the SD card is mounted.
 - **Camera:** Select a camera view area.
 - **Stream profile:** Select a stream profile or **Create a stream profile**.
 - **Prebuffer and Postbuffer:** Set the desired values.
3. Click **Save**.

Activate strobe siren over MQTT when there is an alarm

This example explains how to connect a camera to the strobe siren over MQTT, and activate a profile in the strobe siren whenever the air quality sensor, connected with the camera, detects temperature is out of the preset range.

Important

Check that a PoE class 4 power supply is used, when the device is connected to a strobe siren.

Before you start :

- Create a profile in the strobe siren.
- Set up an MQTT broker and get the broker's IP address, username and password.
- Set up AXIS Air quality monitor in the camera.

Set up the MQTT client in the camera :

1. In the camera's webpage, go to **System > MQTT > MQTT client > Broker** and enter the following information:
 - **Host:** Broker IP address
 - **Client ID:** For example Camera 1
 - **Protocol:** The protocol the broker is set to
 - **Port:** The port number used by the broker
 - **The broker Username and Password**
2. Click **Save** and **Connect**.

Create a rule in the camera for MQTT publishing :

1. Go to **System > Events > Rules** and add a rule.
2. Enter the following information:
 - **Name:** Temperature out of range
 - **Condition:** Air quality monitor > Air quality outside acceptable range
 - **Sensor:** Temperature
 - **Action:** MQTT > Send MQTT publish message
 - **Topic:** Temperature out of range
 - **Payload:** On
 - **QoS:** 0, 1 or 2
3. Click **Save**.

Set up the temperature range

- In the camera's webpage, go to **Air quality monitor > Settings** . Enter the **MIN** and **MAX** data to set the temperature range.

Set up the MQTT client in the strobe siren :

1. In the strobe siren's webpage, go to **System > MQTT > MQTT client > Broker** and enter the following information:
 - **Host:** Broker IP address
 - **Client ID:** Siren 1
 - **Protocol:** The protocol the broker is set to
 - **Port:** The port number used by the broker
 - **Username and Password**
2. Click **Save** and **Connect**.
3. Go to **MQTT subscriptions** and add a subscription. Enter the following information:
 - **Subscription filter:** Temperature out of range
 - **Subscription type:** Stateful
 - **QoS:** 0, 1 or 2
4. Click **Save**.

Create a rule in the strobe siren for MQTT subscriptions :

1. Go to **System > Events > Rules** and add a rule.
2. Enter the following information:
 - **Name:** Temperature out of range
 - **Condition:** MQTT > Stateful
 - **Subscription filter:** Temperature out of range
 - **Payload:** On
 - **Action:** Light and siren > Run light and siren profile while the rule is active
 - **Profile:** Select the profile you want to be active.
3. Click **Save**.

Flash status LED on air quality sensor when there is an alarm

This example explains how to flash status LED on air quality sensor when CO2 is too high.

Create a rule

1. In the camera's webpage, go to **Events >Rules > Add a rule** to create a rule.
2. Enter the following information:
 - **Name:** Type a name for the rule.
 - **Conditions:** Air quality monitor > Air quality outside acceptable range
 - **Sensors:** CO2
 - **Actions:** Flash I/O interface status LED
 - **Color:** Red
 - **Duration**
3. Click **Save**.

Set up the alarm range for CO2

1. In the camera's webpage, go to **Air quality monitor > Settings > CO2**.
2. Enter the **MIN** and **MAX** data to set the CO2 range.

Calibration for the first run of the device

Note

- Full CO2 accuracy takes 2 days the first time the device runs.
- The AQI (Air Quality Index) requires 12 hours to be functional the first time the device runs. The AQI will show **Calculating** until it has enough data. The calibration time is required whenever the device reboots.
- Full VOC accuracy is obtained after the device has been running for one hour. The calibration time is required whenever the device reboots.
- Full NOx accuracy is obtained after the device has been running for 6 hours. The calibration time is required whenever the device reboots.


The web interface

To read about all the features and settings available in the web interface of devices with AXIS OS, go to *AXIS OS web interface help*.

Specifications

Product overview

AXIS D6210

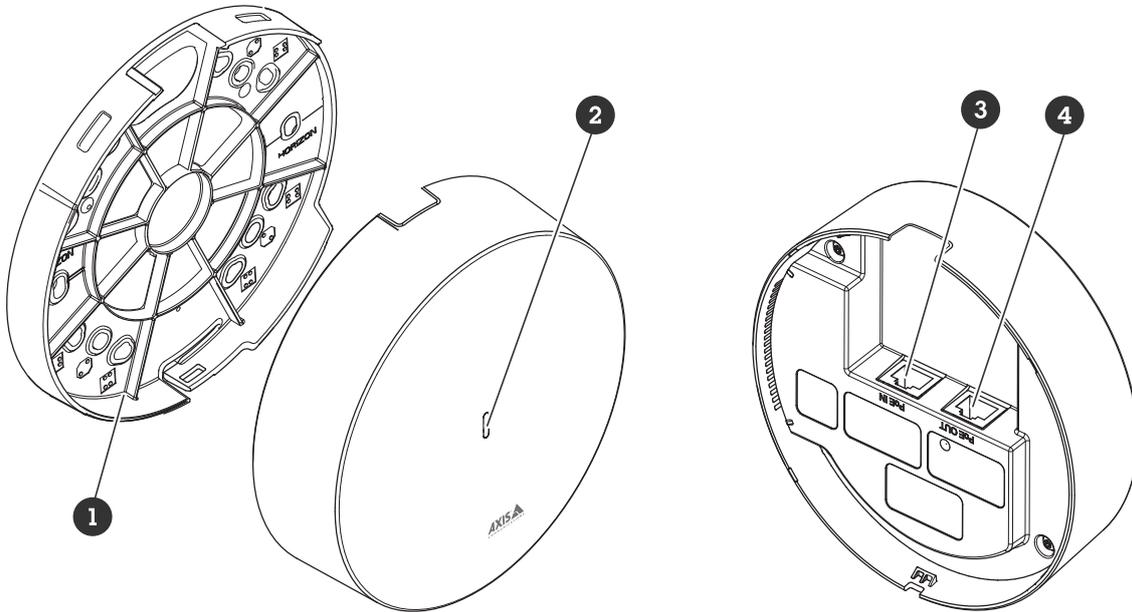

- 1 Bracket mount
- 2 Status LED
- 3 PoE in
- 4 PoE out

LED indicators

Status LED	Indication
Unlit	Connection and normal operation.
Green	Shows steady green for 10 seconds for normal operation after startup completed.
Amber	Steady during startup. Flashes during device software upgrade.
Amber/ Red	Flashes amber/red if network connection is unavailable or lost.
Red	Flashes red for device software upgrade failure.

Connectors

Network connector

Input: RJ45 Ethernet connector with Power over Ethernet (PoE).

Output: RJ45 Ethernet connector with Power over Ethernet (PoE).

Troubleshooting

Technical issues, clues and solutions

If you can't find what you're looking for here, try the troubleshooting section at axis.com/support

The Air quality monitor tab is not visible in the host device's webpage

The webpage is not updated.	Refresh the browser window. If that does not help, clear the browser cache.
Wrong host device firmware version.	Make sure that the host device has the latest firmware version installed. For information about how to check the host device's firmware version, see the host device's user manual.
The network connection is unavailable.	Check the LED indicators on the product and compare with the LED indicators table on .
The input and output network cables are connected to the wrong connectors.	Interchange the input and output network cables.
The host device is not compatible.	Go to the device's product page to see if your host device is compatible.

The Air quality monitor tab is visible but Air quality sensor is not working

The host device has been disconnected from the Air quality sensor.	Reconnect the host device to the Air quality sensor and refresh the host device's webpage.
--------------------------------------------------------------------	--------------------------------------------------------------------------------------------

The host device doesn't start up after connecting it to the product

Hardware issue	Contact Axis support.
The network connection is unavailable.	Check the LED indicators on the product and compare with the LED indicators table on .
The input and output network cables are connected to the wrong connectors.	Interchange the input and output network cables.

Contact support

If you need more help, go to axis.com/support.

T10225114

2026-02 (M6.2)

© 2025 – 2026 Axis Communications AB